


**LINE POST**

**CORNER POST**

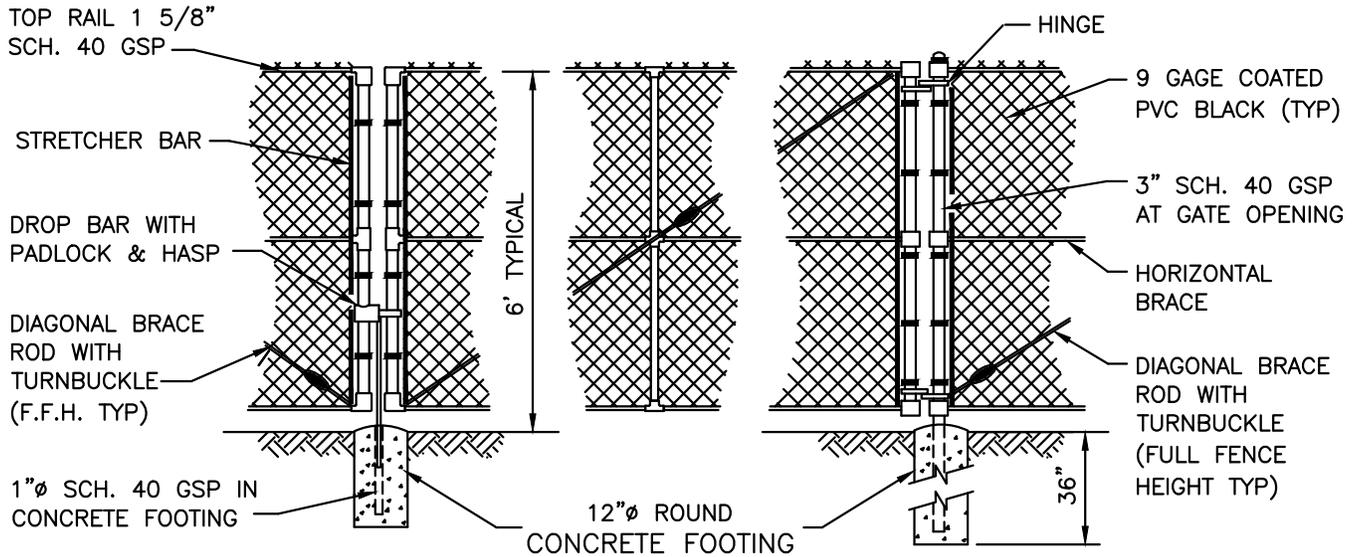

**GATE**

**GATE POST**

**NOTES:**

1. AN OPAQUE CHAIN LINK FENCE, AT LEAST 6' HIGH SHALL BE PROVIDED.
2. COATED STEEL WOVEN WIRE FABRIC SHALL BE STRETCHED TAUT WITH STRETCHER BARS AND STRAPS. FASTENED TOP & BOTTOM AT LINE POSTS WITH GALVANIZED PIG RING TIES.
3. THE GATE SHALL BE SEMI-TRANSPARENT TO ALLOW FOR VISUAL INSPECTION BY SLWSD.
4. GATES TO BE SECURED OPEN WITH GATE STOP SET IN CONCRETE.
5. ALL MATERIAL SHALL BE BLACK IN COLOR.



**MINIMUM CONSTRUCTION STANDARDS FOR  
ST. LUCIE WEST SERVICES DISTRICT  
450 SW UTILITY DRIVE,  
PORT SAINT LUCIE, FL 34986  
PHONE: (772) 340-0220**

**FENCE DETAILS**

**DETAIL: SLWG-16B**

**DATE: 03/2020**

**SCALE: N.T.S.**

**SHEET: 2 OF 2**